


LM-80

LED light source lumen
maintenance test


2835



■ 應用



• 2.8 * 3.5 * 0.75 mm

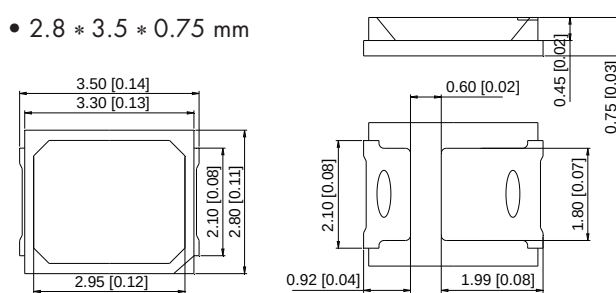

Product Type	CCT (K)	Φ (lm) Typ	Ra ≥	VF (V)		Rth J-S (°C/W)	IF (mA)
				Min	Max		
A-2835D49W-S1-08-HR3	3000	63	80	2.8	3.6	22	150
	6000	68					
A-2835D46W-S1-08-HR3	3000	60	80	2.8	3.6	22	150
	6000	65					
A-2835D1W-S1-08-HR3	3000	55	80	2.8	3.4	22	150
	6000	58					
A-2835H431W-S1-08-HR3	3000	27	80	2.8	3.4	35	60
	6000	28					
A-2835H421W-S1-08-HR3	3000	26	80	2.8	3.4	35	60
	6000	27					
A-2835H489W-S1-08L-HR3	3000	24	80	2.8	3.4	35	60
	6000	25					
A-2835D1W-2C-S1-08-PCT-HR3	3000	105	80	5.6	6.8	15	150
	6000	115					
A-2835D1W-3C-S1-08-PCT-HR3	3000	125	80	8.8	10.8	14	120
	6000	135					


3528



■ 應用



• 3.5 * 2.8 * 1.0 mm

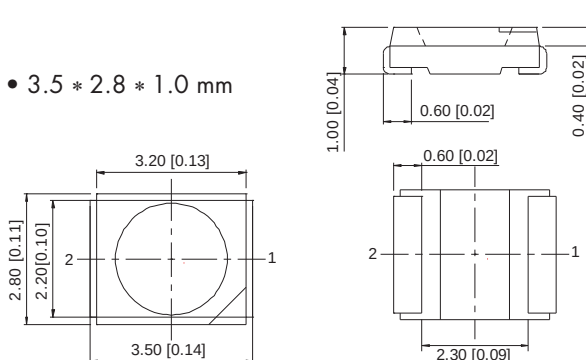

Product Type	CCT (K)	Φ (lm) Typ	Ra ≥	VF (V)		Rth J-S (°C/W)	IF (mA)
				Min	Max		
A-3528H252W-S1-10-HR3	3000	8.8	80	2.6	3.3	100	20
	6000	9.3					
A-3528H343W-S1-10-HR3	3000	8.3	80	2.8	3.4	100	20
	6000	8.5					


3014



■ 應用





• 3.0 * 1.4 * 0.8 mm

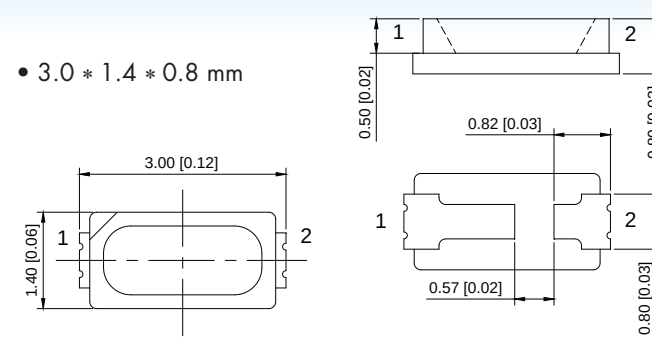

Product Type	CCT (K)	Φ (lm) Typ	Ra ≥	VF (V)		Rth J-S (°C/W)	IF (mA)
				Min	Max		
A-3014H431W-S1-08-HR3	3000	13	80	2.6	3.2	50	30
	6000	13.5					
A-3014H421W-S1-08-HR3	3000	12.5	80	2.6	3.2	50	30
	6000	13					
A-3014H415W-S1-08L-HR3	3000	11	80	2.6	3.4	50	30
	6000	11.5					

UVLED C3535

• 3.45 * 3.45 * 1.9 mm

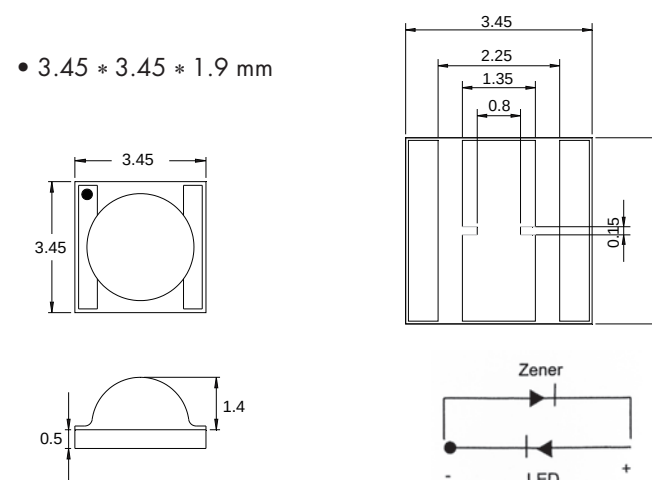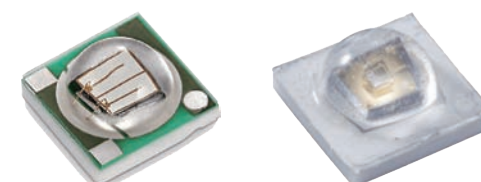

■ 工業應用產品



■ 家庭消毒產品



■ 個人消毒產品



Product Type	Figure	Forward Current	VF	POUT	FWHM	ESD	L (50)
C3535S14V-LVR15	280nm	20mA	6V	1.0mw	10nm	>4000V	1008H
C3535S15V-LVR15	310nm	20mA	6V	1.0mw	10nm	>4000V	1008H
C3535F7V1EA	365nm	350mA	3.4V	135mw	10nm	>4000V	1008H