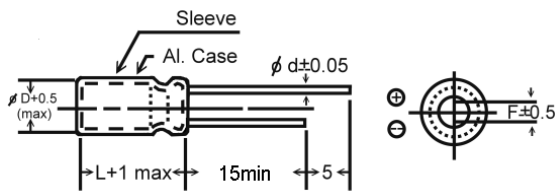


承 認 書

鋁質電解電容器		105℃	HL	Series	日 期：111 年 06 月 08 日					
容 量： 22 μ F		誤差度： $\pm 20\%$			形 狀： 直 立 式					
電 壓： 250 V DC		數 量： PCS			結 論：					
Shape & Dimension (mm)  D : 10.0 ± 0.5 F : 5.0 ± 0.5 L : 20.0 ± 1.0 d : 0.6 ± 0.05					1. 承 認 2. 有條件地承認 3. 退 件					
Specification										
F = 120 HZ					T = 20 °C					
1 Operating Temperature Range					: - 40 °C + 105 °C					
2 Leakage Current					: Not greater than $I \leq 0.04 CV + 100\mu A$					
3 Surge Voltage DC					: 300 VOLT					
4 Dissipation Factor (Tan δ)					: 0.15 MAX.					
5 Max. Permissible ripple current					: 200 mA(120Hz/105°C)					
6 Load Test :					After 8000 hours application of W.V. at 105°C The capacitor shall meet with following limits : Capacitance Change : $\leq \pm 25\%$ of initial value Dissipation Factor : $\leq 200\%$ of initial specified value Leakage Current : $\leq$ initial specified value					
INITIAL TEST										
	1	2	3	4	5	6	7	8	9	10
容 量 μ F										
洩漏電流										
DF 值										
R 值										