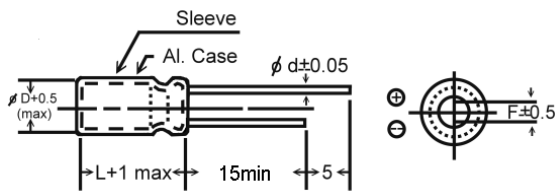


承 認 書

鋁質電解電容器 105°C XF Series			日 期：111 年 06 月 08 日							
容 量： 220 μ F		誤差度： $\pm 20\%$		形 狀： 直 立 式						
電 壓： 50 V DC		數 量： PCS		結 論：						
Shape & Dimension (mm)  D : 10.0 ± 0.5 F : 5.0 ± 0.5 L : 16.0 ± 1.5 d : 0.6 ± 0.05				1. 承 認 2. 有條件地承認 3. 退 件						
Specification										
F = 120 HZ			T = 20 °C							
1 Operating Temperature Range		: - 40 °C + 105 °C								
2 Leakage Current		: I $\leq$ 0.01 CV or 3uA								
3 Surge Voltage DC		: 63 VOLT								
4 Dissipation Factor (Tan δ)		: 0.1 MAX.								
5 Max.Impedance (20°C/100KHz)		: 95 m Ω MAX.								
6 Max. Permissible ripple current		: 1300 mA/105°C/100KHz								
7 Load Test : After 7000 hours application of W.V. at 105°C The capacitor shall meet with following limits : Capacitance Change : $\leq \pm 25\%$ of initial value Dissipation Factor : $\leq 200\%$ of initial specified value Leakage Current : $\leq$ initial specified value										
INITIAL TEST										
	1	2	3	4	5	6	7	8	9	10
容 量 μ F										
洩漏電流										
DF 值										
R 值										