



Seven Segment Display Data Sheet


Description

This YDD-42033AE-N is a 0.4 inch (10.22mm) digit height dual digit seven-segment display. The device utilizes red LED chips, which are made from GaAsP on transparent GaP substrate, and has a gray face and white segments.

Features


- 0.4-inch (10.22mm) digit height
- Continuous uniform segments
- Low power requirement
- Excellent characters appearance
- High brightness & high contrast
- Wide viewing angle
- Solid state reliability
- Categorized for luminous intensity

Package Dimensions

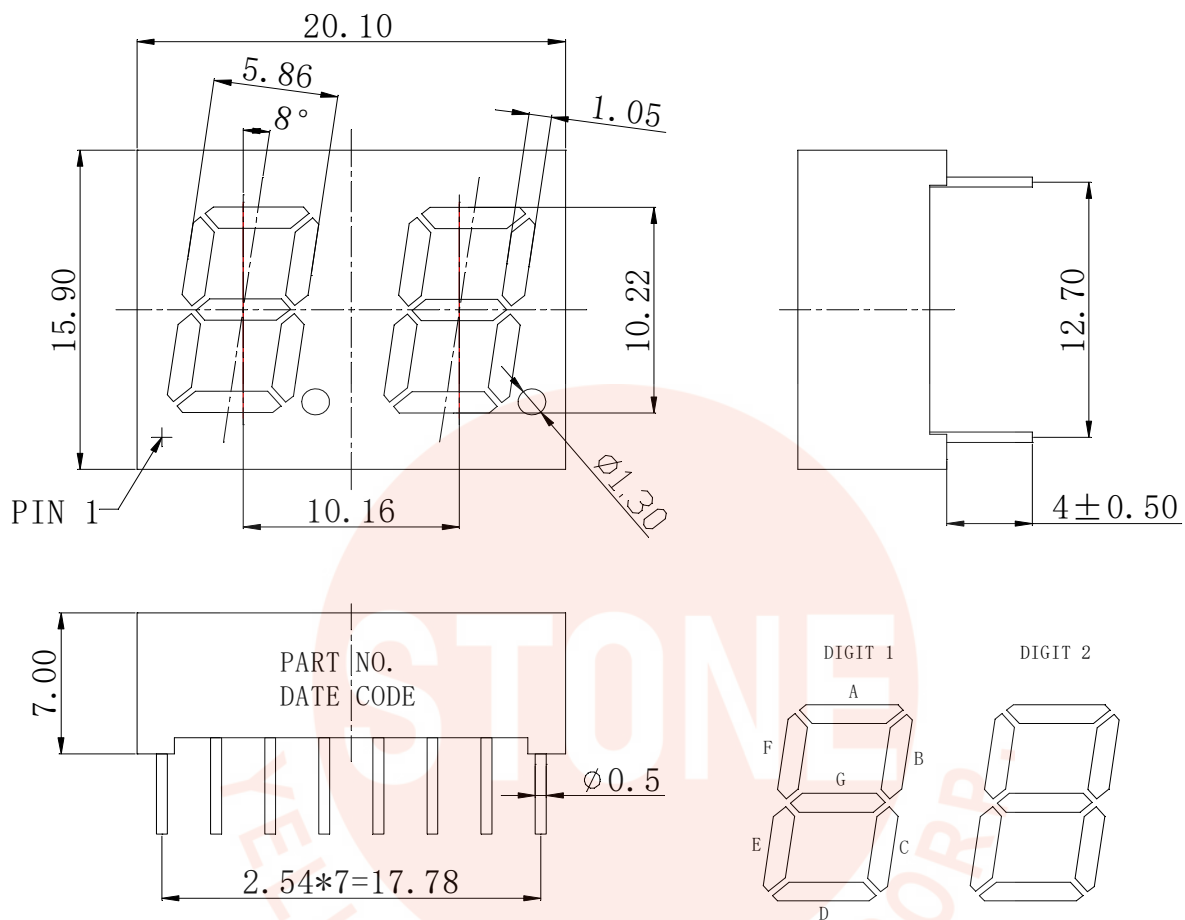

1. All dimensions are in millimeters. Tolerances are 0.25 mm (0.01") unless otherwise noted.

Internal Circuit Diagram

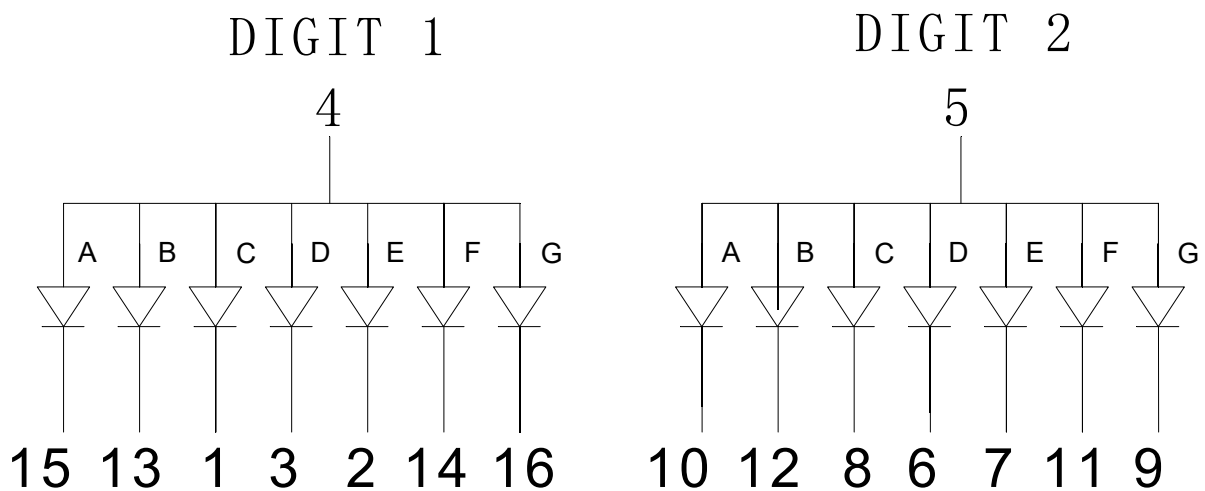



Absolute Maximum Rating (Ta = 25°C)

Parameter	Maximum	Unit
Power Dissipation Per Segment	70	mW
Peak Forward Current Per Segment	90	mA
Continuous Forward Current Per Segment	25	mA
Reverse Voltage Per Segment	5	V
Operating Temperature Range	-35°C to +85°C	
Storage Temperature Range	-35°C to +85°C	
Soldering Conditions: 1/16 inch below seating plane for 3 seconds at 260°C		

This product should be operated in forward bias. If a reverse voltage is continuously applied to the product, such operation can cause migration resulting in LED damage.

Electrical / Optical Characteristics (Ta = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Average Luminous Intensity Per Segment	Iv	3.6	6.4		mcd	IF=10mA
Peak Emission Wavelength	λ_p		630		nm	IF=20mA
Spectral Line Half-Width	$\Delta\lambda$		40		nm	IF=20mA
Dominant Wavelength	λ_d		621		nm	IF=20mA
Forward Voltage Per Segment	VF		2.0	2.6	V	IF=20mA
Reverse Current Per Segment	IR			100	μ A	VR=5V
Luminous Intensity Matching Ratio	Iv-m			2:1		IF=10mA






Note:1.Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commision Internationale De L'Eclairage) eye-response curve.

2.Wavelength: +/-1nm Luminous Intensity: +/-15% Forward Voltage: +/-0.1V

Typical Electrical / Optical Characteristic Curves

(25°C Ambient Temperature Unless Otherwise Noted)

RELATIVE INTENSITY vs WAVELENGTH

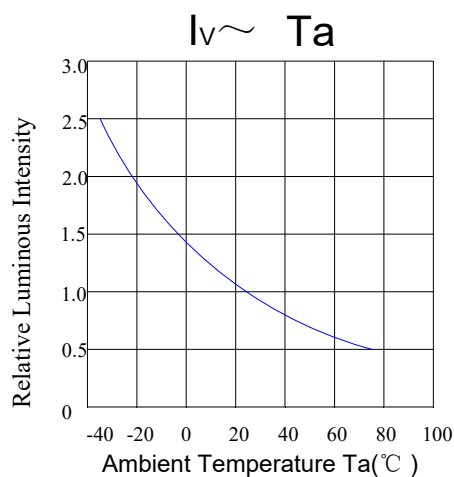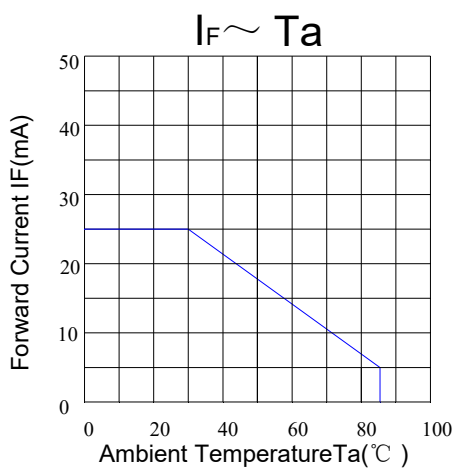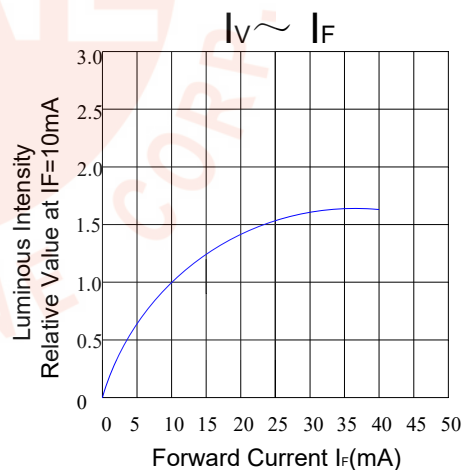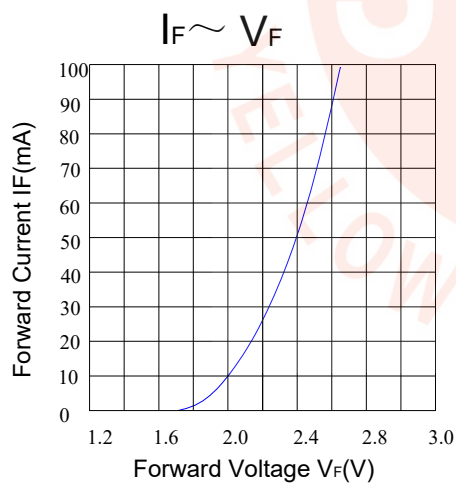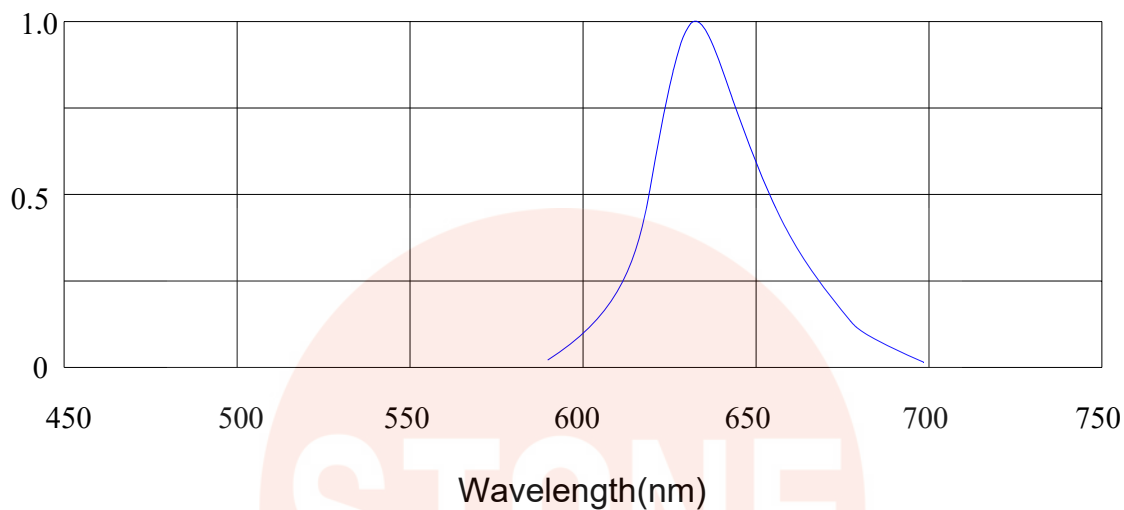



早安股份有限公司
YELLOW STONE CORP.

Package Flow

