



Seven Segment Display Data Sheet


Description

This YDT-33636CY-N is a 0.36inch (9.2mm) digit height triple digit seven-segment display. This device utilizes AlInGaP yellow LED chips, which are made from AlInGaP on a non-transparent GaAs substrate, and has black face and white segments.

Features


- 0.36-inch (9.2 mm) digit height
- Continuous uniform segments
- Low power requirement
- Excellent characters appearance
- High brightness & high contrast
- Wide viewing angle
- Solid state reliability
- Categorized for luminous intensity

Package Dimensions

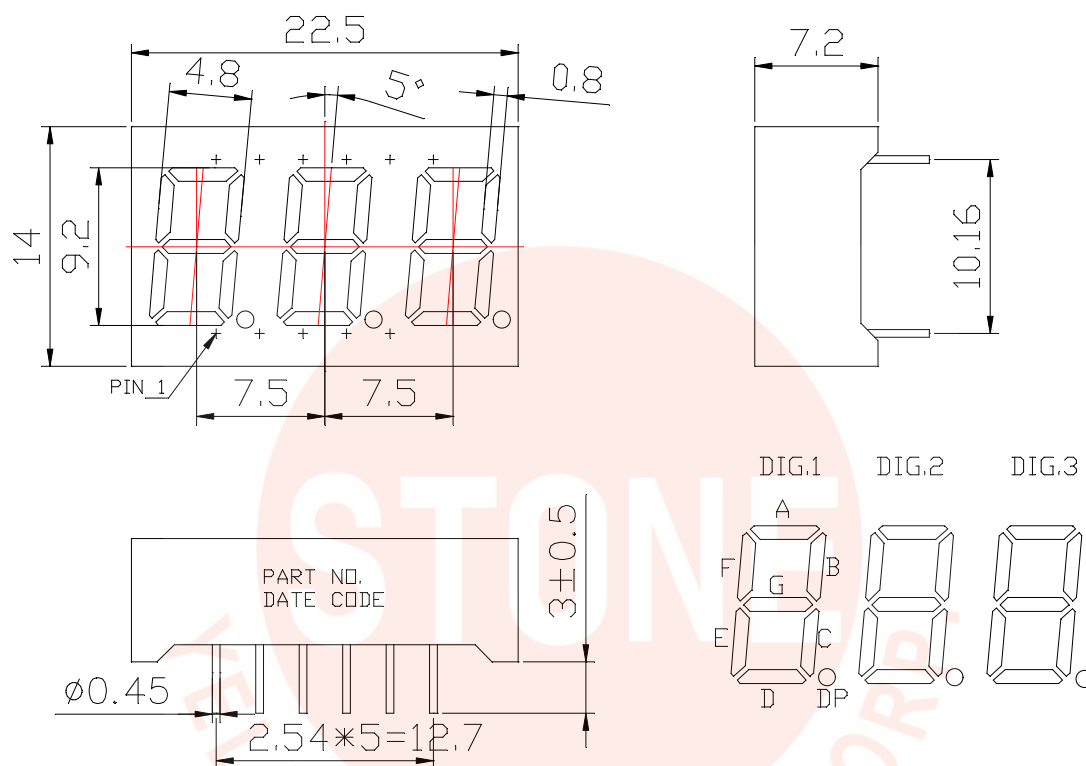

All dimensions are in millimeters. Tolerances are ± 0.25 mm (0.01") unless otherwise noted.

Internal Circuit Diagram

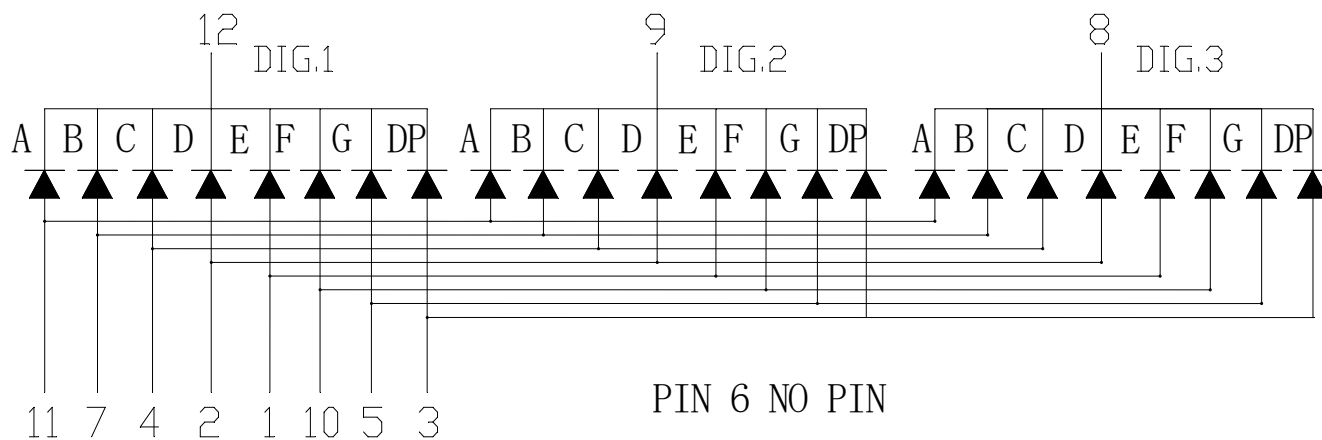

Absolute Maximum Rating (Ta = 25°C)

PARAMETER	MAX.	UNIT
Power Dissipation Per Segment	70	mW
Peak Forward Current Per Segment (Frequency 1Khz, 15% duty cycle)	60	mA
Continuous Forward Current Per Segment	25	mA
Reverse Voltage Per Segment	5	V
Operating Temperature Range	-35 ⁰ C to +85 ⁰ C	
Storage Temperature Range	-35 ⁰ C to +85 ⁰ C	
Soldering Conditions:1/16 inch below seating plane for 3 seconds at 260°C		

This product should be operated in forward bias. If a reverse voltage is continuously applied to the product, such operation can cause migration resulting in LED damage.

Electrical / Optical Characteristics (Ta = 25°C)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity	Iv	5.4	8.6		mcd	I _F =10mA
Peak Emission Wavelength	λ _p		588		nm	I _F =20mA
Spectral Line Half-Width	Δλ		15		nm	I _F =20mA
Dominant Wavelength	λ _d		587		nm	I _F =20mA
Forward Voltage Per Segment	V _F		2.1	2.7	V	I _F =20mA
Reverse Current Per Segment	I _R			10	μA	V _R =5V
Luminous Intensity Matching Ratio	Iv-m			2:1		I _F =10mA






Note: 1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commission Internationale De L'Eclairage) eye-response curve.

2. Wavelength: +/-1nm Luminous Intensity: +/-15% Forward Voltage: +/-0.1V

Typical Electrical / Optical Characteristic Curves

(25°C Ambient Temperature Unless Otherwise Noted)

RELATIVE INTENSITY vs WAVELENGTH

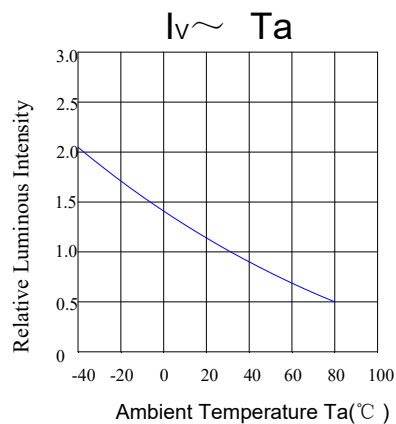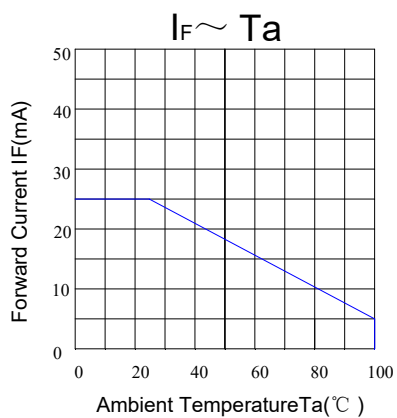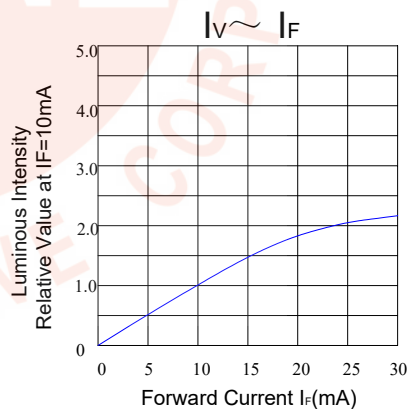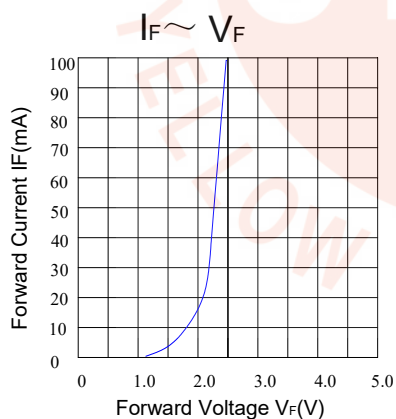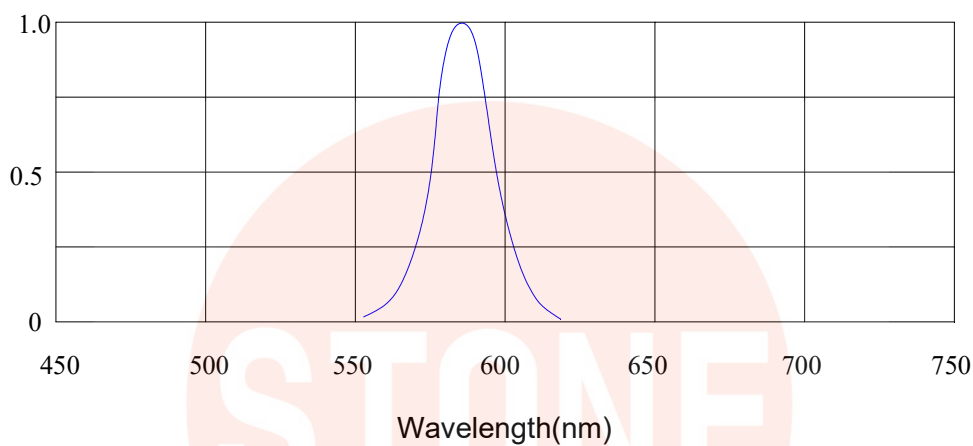



早安股份有限公司
YELLOW STONE CORP.

Package Flow

