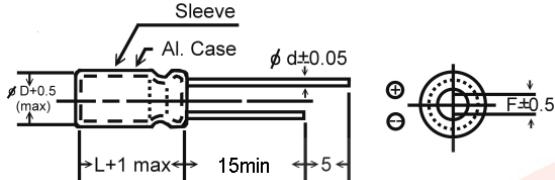


承 認 書

鋁質電解電容器 105°C HR Series		日期：111年06月22日																																												
容 量： 470 μ F	誤 差 度： $\pm 20\%$	形 狀： 直 立 式																																												
電 壓： 35 V DC	數 量： PCS	結 論：																																												
Shape & Dimension (mm) 		1. 承 認 2. 有條件地承認 3. 退 件																																												
Specification <table border="0" style="width: 100%;"> <tr> <td style="width: 33%;">F = 120 HZ</td> <td style="width: 33%;">T = 20 °C</td> <td style="width: 34%;"></td> </tr> <tr> <td>1 Operating Temperature Range</td> <td colspan="2">: - 40 To + 105 °C</td> </tr> <tr> <td>2 Leakage Current</td> <td colspan="2">: Not greater than I \leq 0.01 CV or 3 μA</td> </tr> <tr> <td>3 Surge Voltage DC</td> <td colspan="2">: 44 VOLT</td> </tr> <tr> <td>4 Dissipation Factor (Tan δ)</td> <td colspan="2">: 0.12 MAX</td> </tr> <tr> <td>5 Load Test :</td> <td colspan="2"> After 2000 hours application of W.V. at 105°C The capacitor shall meet with following limits : Capacitance Change : $\leq \pm 25\%$ of initial value Dissipation Factor : $\leq 200\%$ of initial specified value Leakage Current : \leq initial specified value </td> </tr> </table>			F = 120 HZ	T = 20 °C		1 Operating Temperature Range	: - 40 To + 105 °C		2 Leakage Current	: Not greater than I \leq 0.01 CV or 3 μ A		3 Surge Voltage DC	: 44 VOLT		4 Dissipation Factor (Tan δ)	: 0.12 MAX		5 Load Test :	After 2000 hours application of W.V. at 105°C The capacitor shall meet with following limits : Capacitance Change : $\leq \pm 25\%$ of initial value Dissipation Factor : $\leq 200\%$ of initial specified value Leakage Current : \leq initial specified value																											
F = 120 HZ	T = 20 °C																																													
1 Operating Temperature Range	: - 40 To + 105 °C																																													
2 Leakage Current	: Not greater than I \leq 0.01 CV or 3 μ A																																													
3 Surge Voltage DC	: 44 VOLT																																													
4 Dissipation Factor (Tan δ)	: 0.12 MAX																																													
5 Load Test :	After 2000 hours application of W.V. at 105°C The capacitor shall meet with following limits : Capacitance Change : $\leq \pm 25\%$ of initial value Dissipation Factor : $\leq 200\%$ of initial specified value Leakage Current : \leq initial specified value																																													
INITIAL TEST <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> <th>7</th> <th>8</th> <th>9</th> <th>10</th> </tr> </thead> <tbody> <tr> <td>容 量 μF</td> <td></td> </tr> <tr> <td>洩漏電流</td> <td></td> </tr> <tr> <td>DF 值</td> <td></td> </tr> </tbody> </table>				1	2	3	4	5	6	7	8	9	10	容 量 μ F											洩漏電流											DF 值										
	1	2	3	4	5	6	7	8	9	10																																				
容 量 μ F																																														
洩漏電流																																														
DF 值																																														