


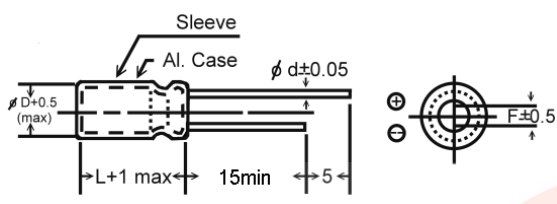

承 認 書

| | | | | | | | | | | |
|--|------------------------------------|--|---|---|---|---|---|---|---|----|
| 鋁質電解電容器 | 105°C GR(HR) Series | 日期: 111年06月22日 | | | | | | | | |
| 容 量 : 100 μ F | 誤差度 : $\pm 20\%$ | 形 狀 : 直 立 式 | | | | | | | | |
| 電 壓 : 35 VDC | 數 量 : PCS | 結 論 : | | | | | | | | |
| Shape & Dimension (mm)  | | 1. 承 認 2. 有 條 件 地 承 認 3. 退 件 | | | | | | | | |
| D : 6.3 ± 0.5 F : 2.5 ± 0.5 L : 11.0 ± 1.0 d : 0.5 ± 0.05 | | | | | | | | | | |
| Specification | | | | | | | | | | |
| F = 120 HZ | | T = 20 °C | | | | | | | | |
| 1 | Operating Temperature Range | : - 40 To + 105 °C | | | | | | | | |
| 2 | Leakage Current | : Not greater than $I \leq 0.01 CV$ or 3 μ A | | | | | | | | |
| 3 | Surge Voltage DC | : 44 VOLT | | | | | | | | |
| 4 | Dissipation Factor (Tan δ) | : 0.12 MAX | | | | | | | | |
| 5 | Load Test : | After 2000 hours application of W.V. at 105°C The capacitor shall meet with following limits : Capacitance Change : $\leq \pm 25\%$ of initial value Dissipation Factor : $\leq 200\%$ of initial specified value Leakage Current : \leq initial specified value | | | | | | | | |
| INITIAL TEST | | | | | | | | | | |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| 容 量 μ F | | | | | | | | | | |
| 洩漏電流 | | | | | | | | | | |
| DF 值 | | | | | | | | | | |